

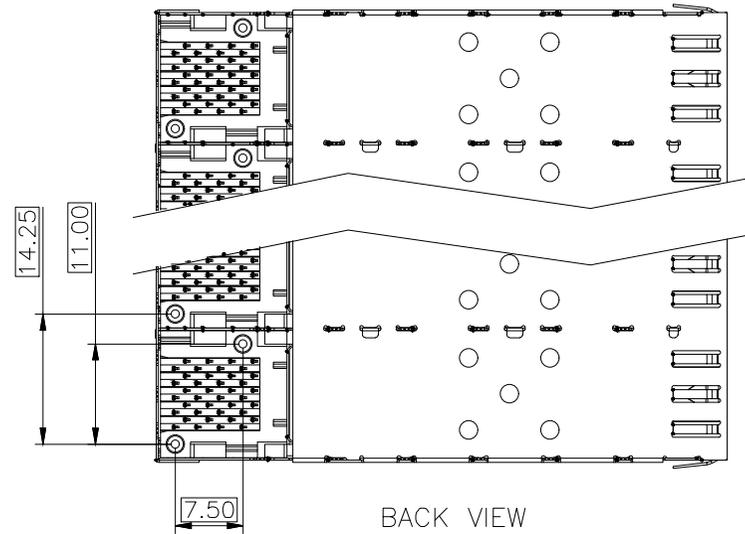
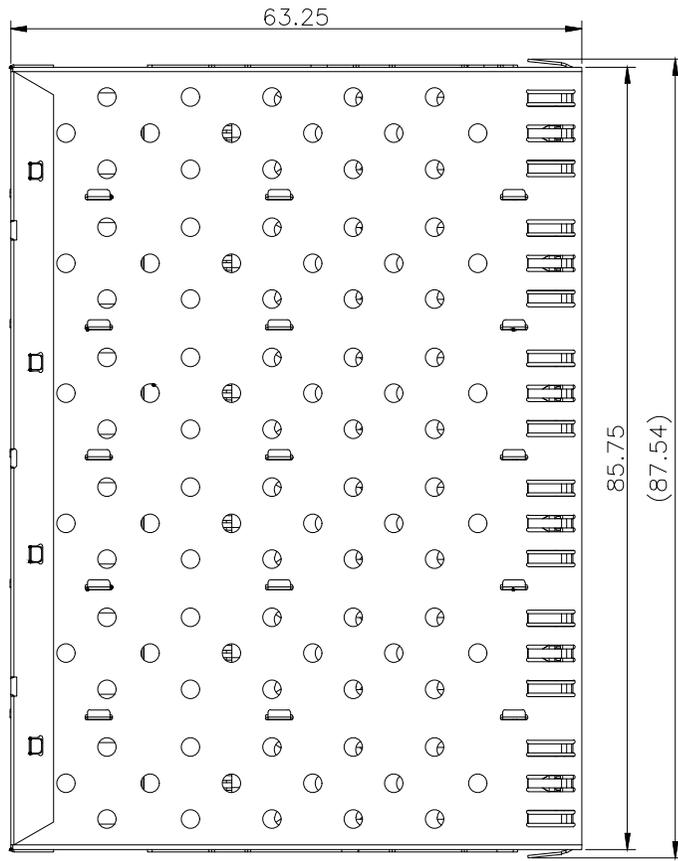
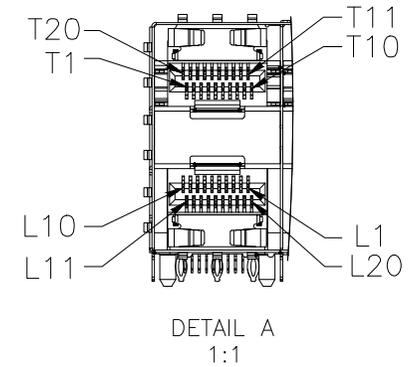


REV	DESCRIPTION OF CHANGE	ERVIEWED BY	ISSUE DATE
A	FIRST ISSUE	LEO	2021-09-28


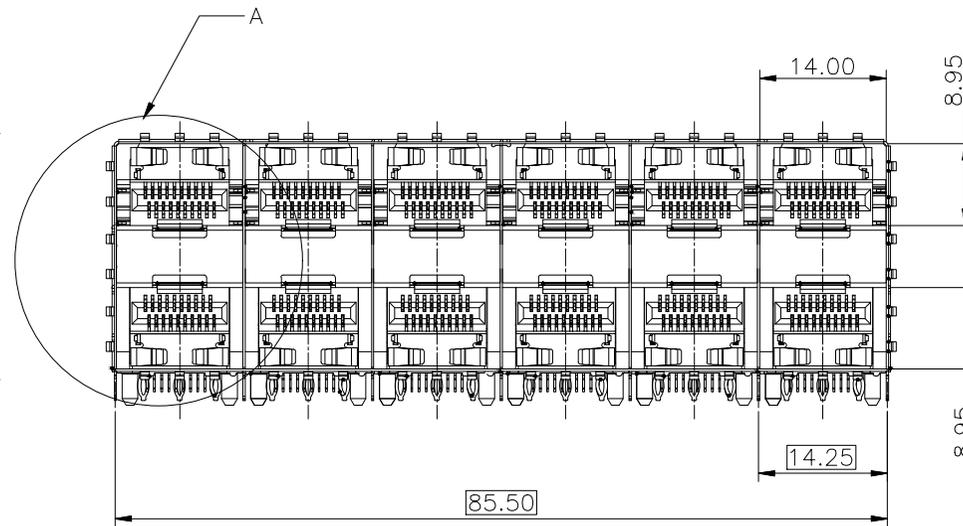


NOTES:

MATERIAL:
 CAGE: NICKEL SILVER, THICKNESS 0.25mm
 LINGHT PIPE: POLYCARBONATE, COLOR: CLEAR.
 CONNECTOR:
 PLASTIC HOUSING: HIGH TEMPERATURE LCP, UL94 V-0.
 SPRING: STAINLESS STEEL, THICKNESS 0.20mm
 CONTACTS: PHOSPHOR BRONZE, THICKNESS 0.20mm
 PLATING: 15 μ " MIN. GOLD ON MATING AREA,
 150 μ " MIN. MATE TIN ON SOLDER TAILS.
 PACKAGING: TRAY PACKAGING.
 TEMPARATURE RANGE: -40°C TO +85°C

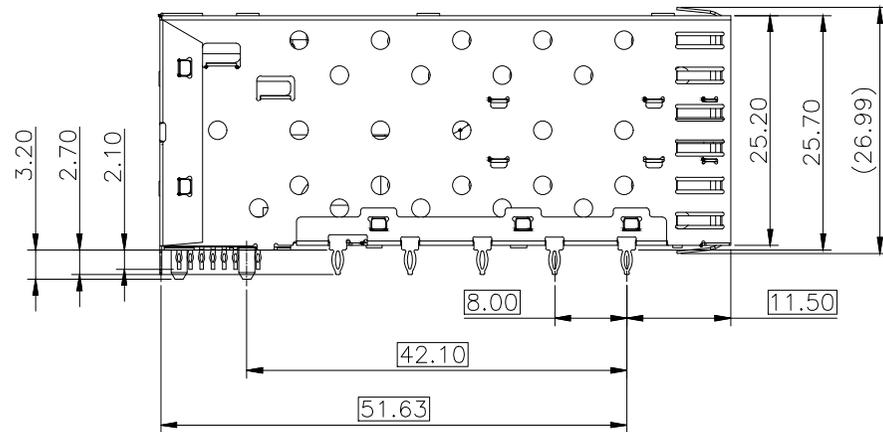

TITLE SFP 2X6 CAGE & CONNECTOR WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP26AC01001			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	° X±0.20	° X±1°	SCALE:1:1	SHEET:1/3
LEO	JAMES	JAMES	° XX±0.15	° XX±5°		
			° XXX±0.10			

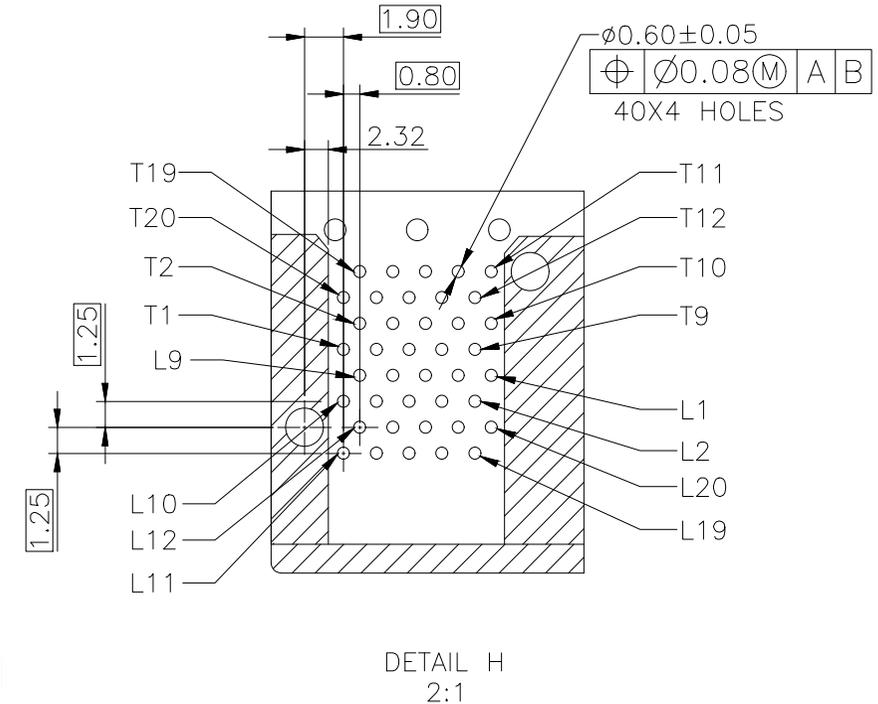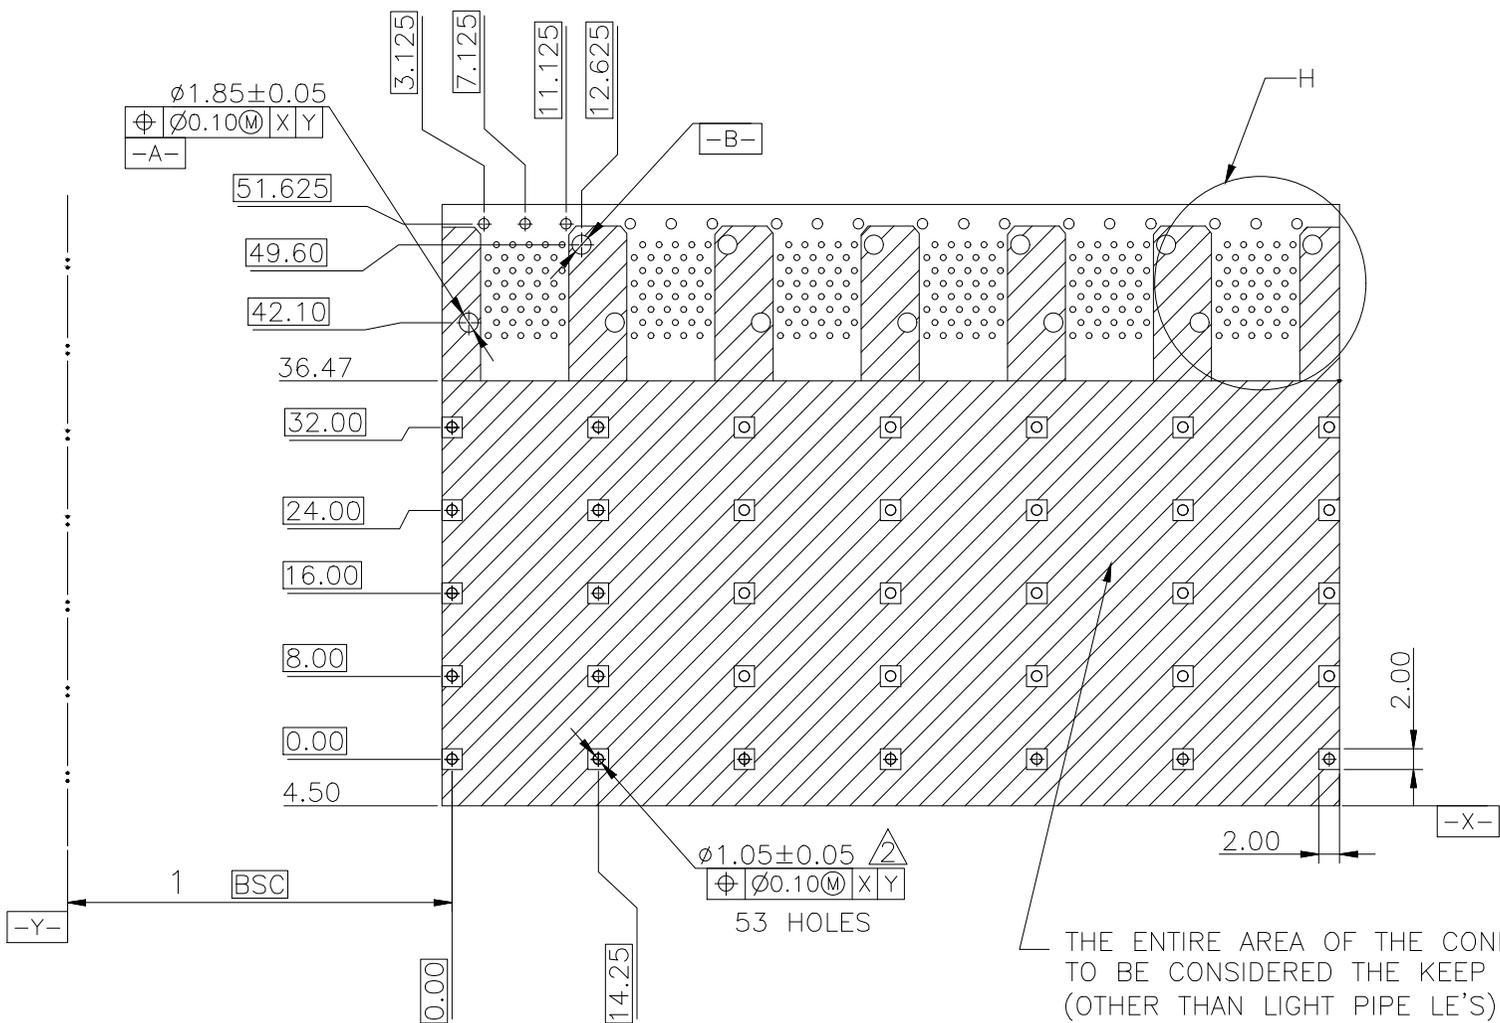

THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT TO BE CONSIDERED THE KEEP OUT AREA FOR COMPONENTS (OTHER THAN LIGHT PIPE LE'S) THIS AREA IS INDICAATED BY THE ADSHED LINE





ECOMMENDED PCB CONFIGURATION

NOTES:

- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 1.05 mm DIAMETER HOLES ARE CHASSIS GROUND.



TITLE SFP 2X6 CAGE & CONNECTOR WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED						
PART NO. LP26AC01001			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4			
APPROVE	CHECK	DRAW		SCALE:1:1	SHEET:2/3	REV:A			
LEO	JAMES	JAMES					<table border="0"> <tr> <td>• X±0.20</td> <td>• X±1°</td> </tr> <tr> <td>• XX±0.15</td> <td>• XX±5°</td> </tr> <tr> <td>• XXX±0.10</td> <td></td> </tr> </table>	• X±0.20	• X±1°
• X±0.20	• X±1°								
• XX±0.15	• XX±5°								
• XXX±0.10									

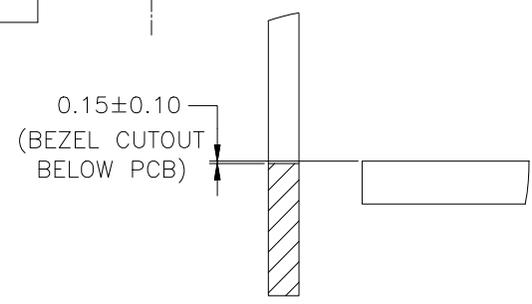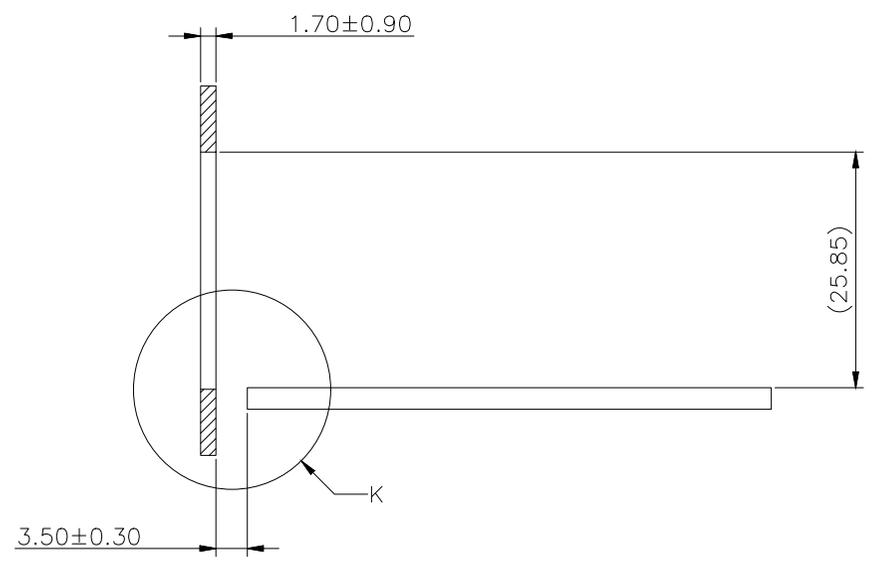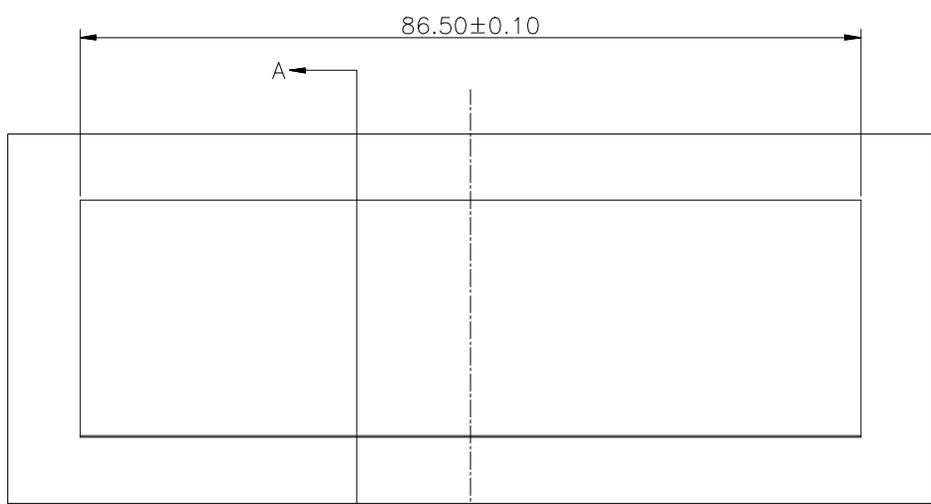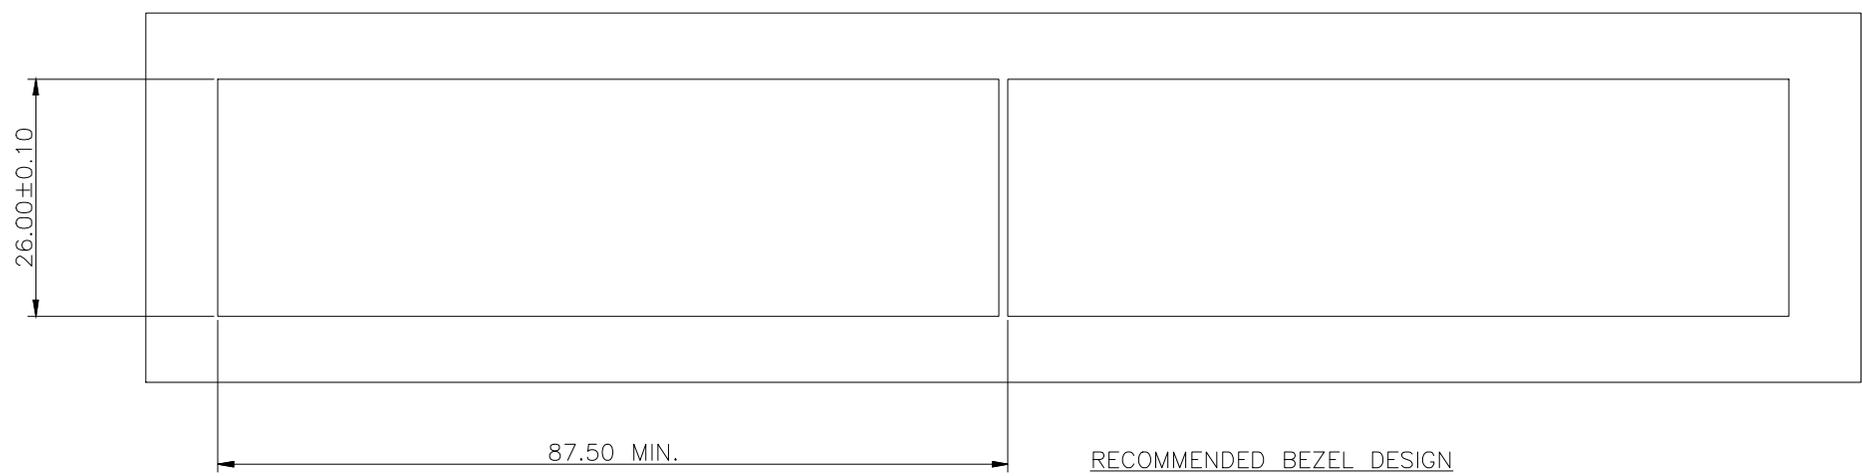

TITLE SFP 2X6 CAGE & CONNECTOR WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP26AC01001			GENERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	° X±0.20	° X±1°	SCALE:1:1	SHEET:3/3
LEO	JAMES	JAMES	° XX±0.15	° XX±5°		
			° XXX±0.10			
					REVISION	REV:A