

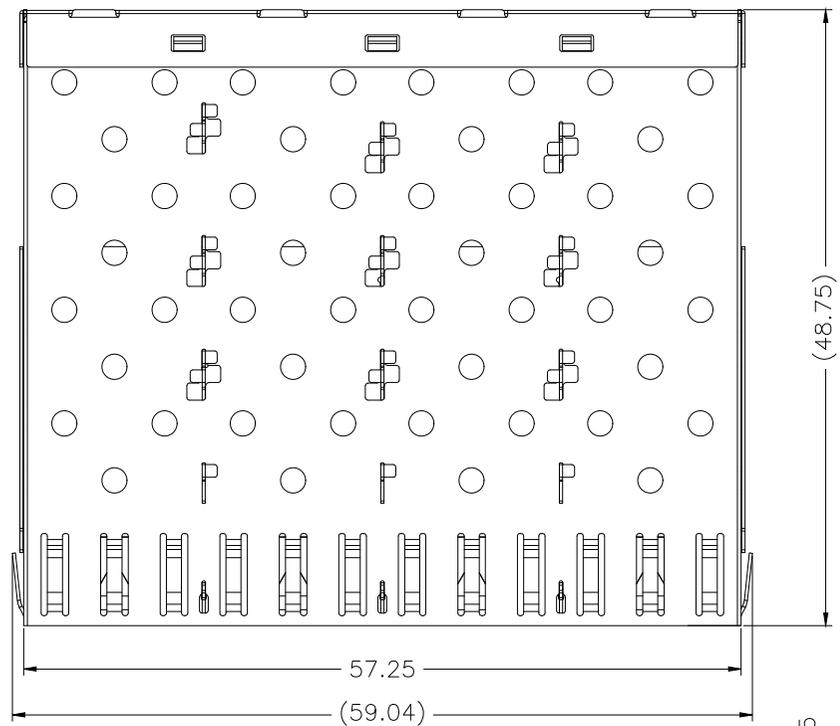
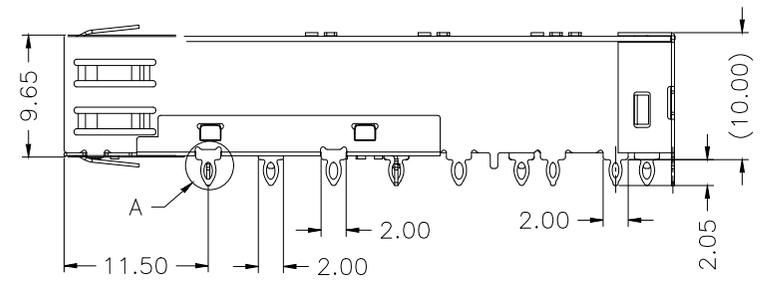


6	7	8
REV	DESCRIPTION OF CHANGE	REVIEWED BY
A	FIRST ISSUE	LEO
		ISSUE DATE
		2021-10-12

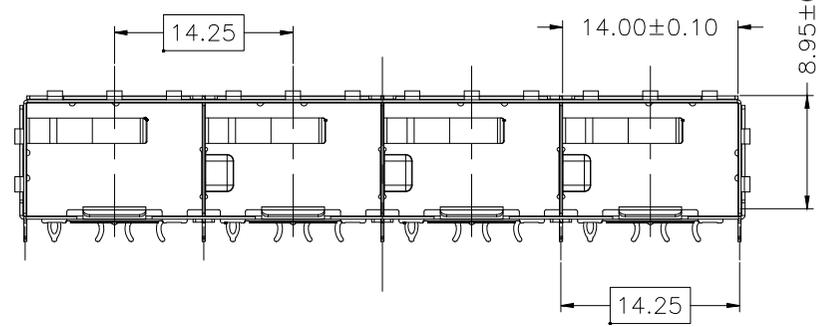



NOTES:

- 1.MATERIAL: COPPER ALLOY, THICKNESS 0.25mm
- 2.PACKAGING: TRAY PACKAGING
- 3.TEMPERATURE RANGE:
 OPERATING : -40°C TO +85°C
 NON OPERATING : -55°C TO +105°C



TITLE			SFP 1x4 CAGE WITH EMI SPRING FINGER		LINK-PP INT'L TECHNOLOGY CO., LIMITED		
PART NO.			LP14AC02000		GENNERAL TOLERANCE		UNIT:MM
APPROVE			CHECK		DRAW		SCALE:1:1
LEO			JAMES		JAMES		SHEET:1/5
							SIZE:A4
							REV:A

RECOMMENDED PCB CONFIGURATION
WITH KEEP-OUT AREAS
SINGLE SIDED APPLICATIONS

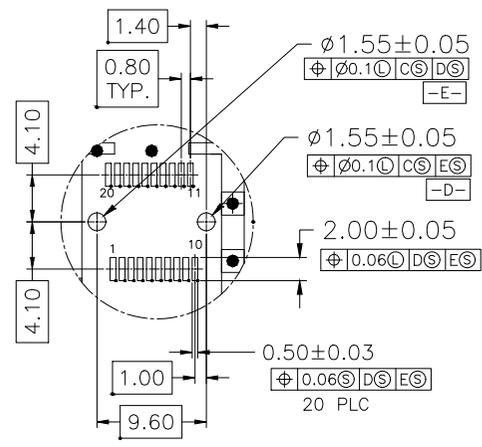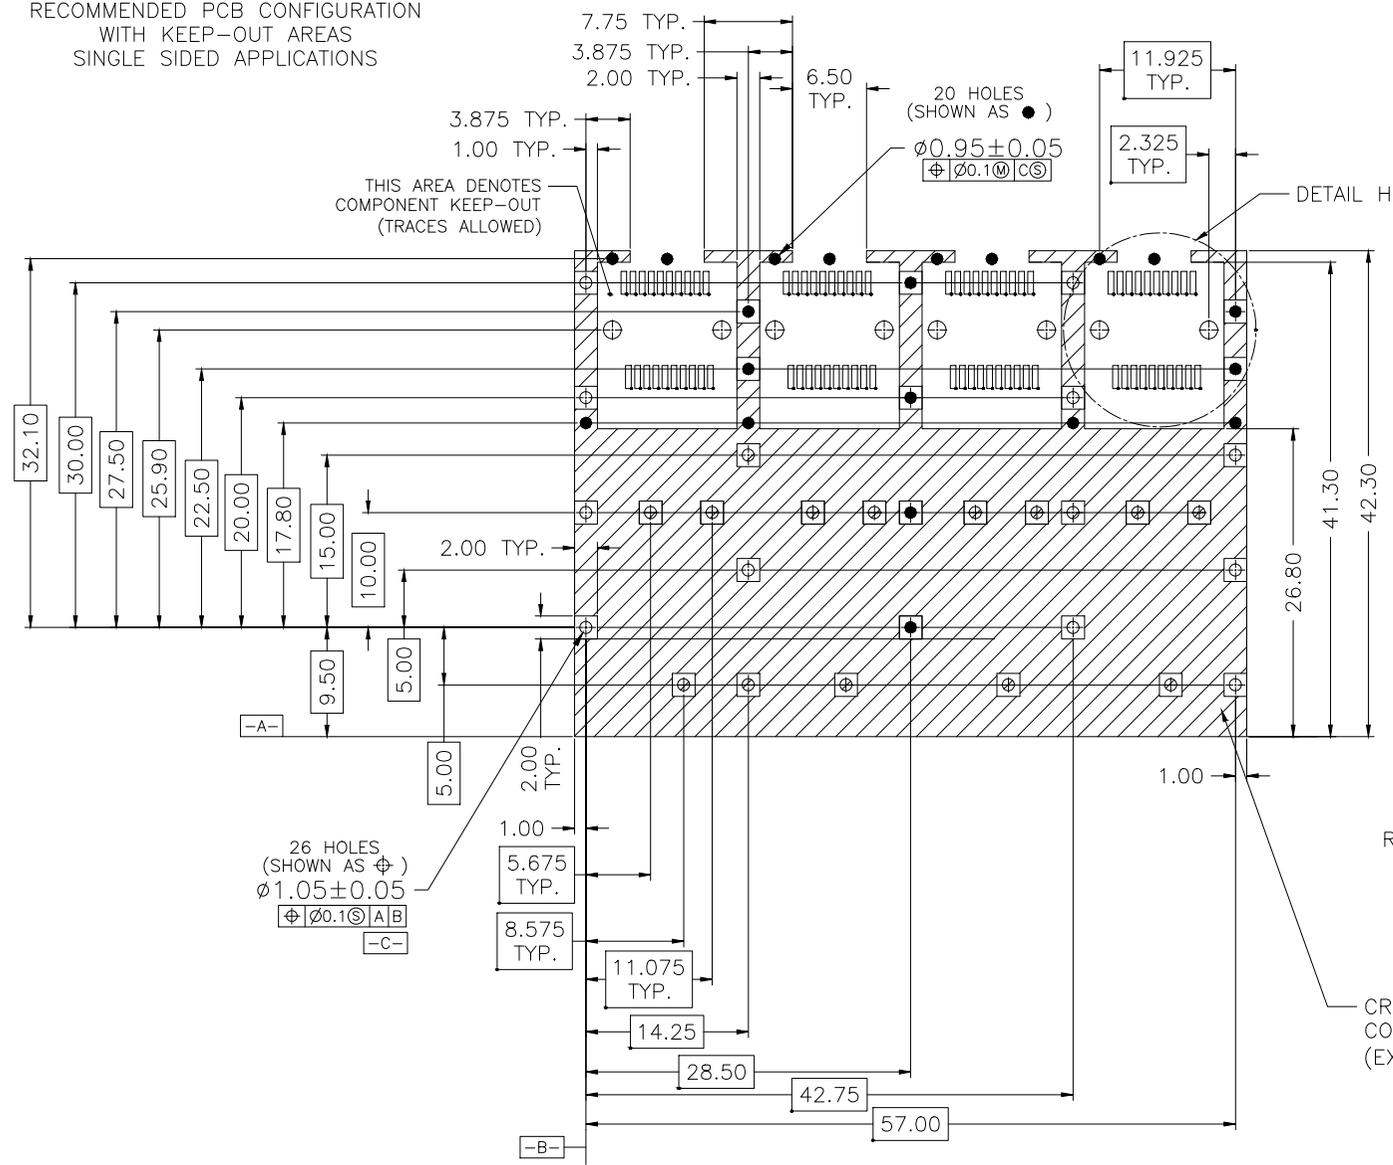



DETAIL H
RECOMMENDED CONNECTOR LAYOUT
4X INDIVIDUALLY

CROSS-HATCHED AREA DENOTES
COMPONENT AND TRACE KEEP-OUT
(EXCEPT CHASSIS GROUND)



TITLE			SFP 1x4 CAGE WITH EMI SPRING FINGER		LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.			LP14AC02000		GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	• X±0.20	• X±1°	SCALE:1:1	SHEET:2/5	REV:A	
LEO	JAMES	JAMES	• XX±0.15	• XX±5°				
			• XXX±0.10					

RECOMMENDED PCB CONFIGURATION
WITH KEEP-OUT AREAS
BELLY TO BELLY APPLICATIONS

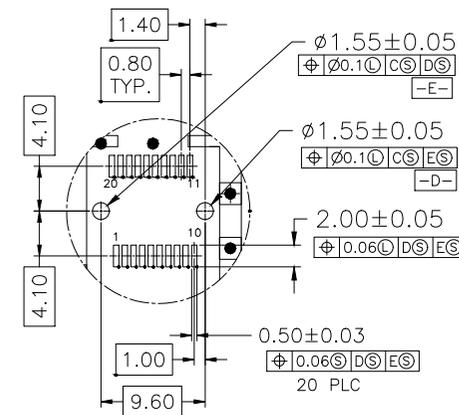
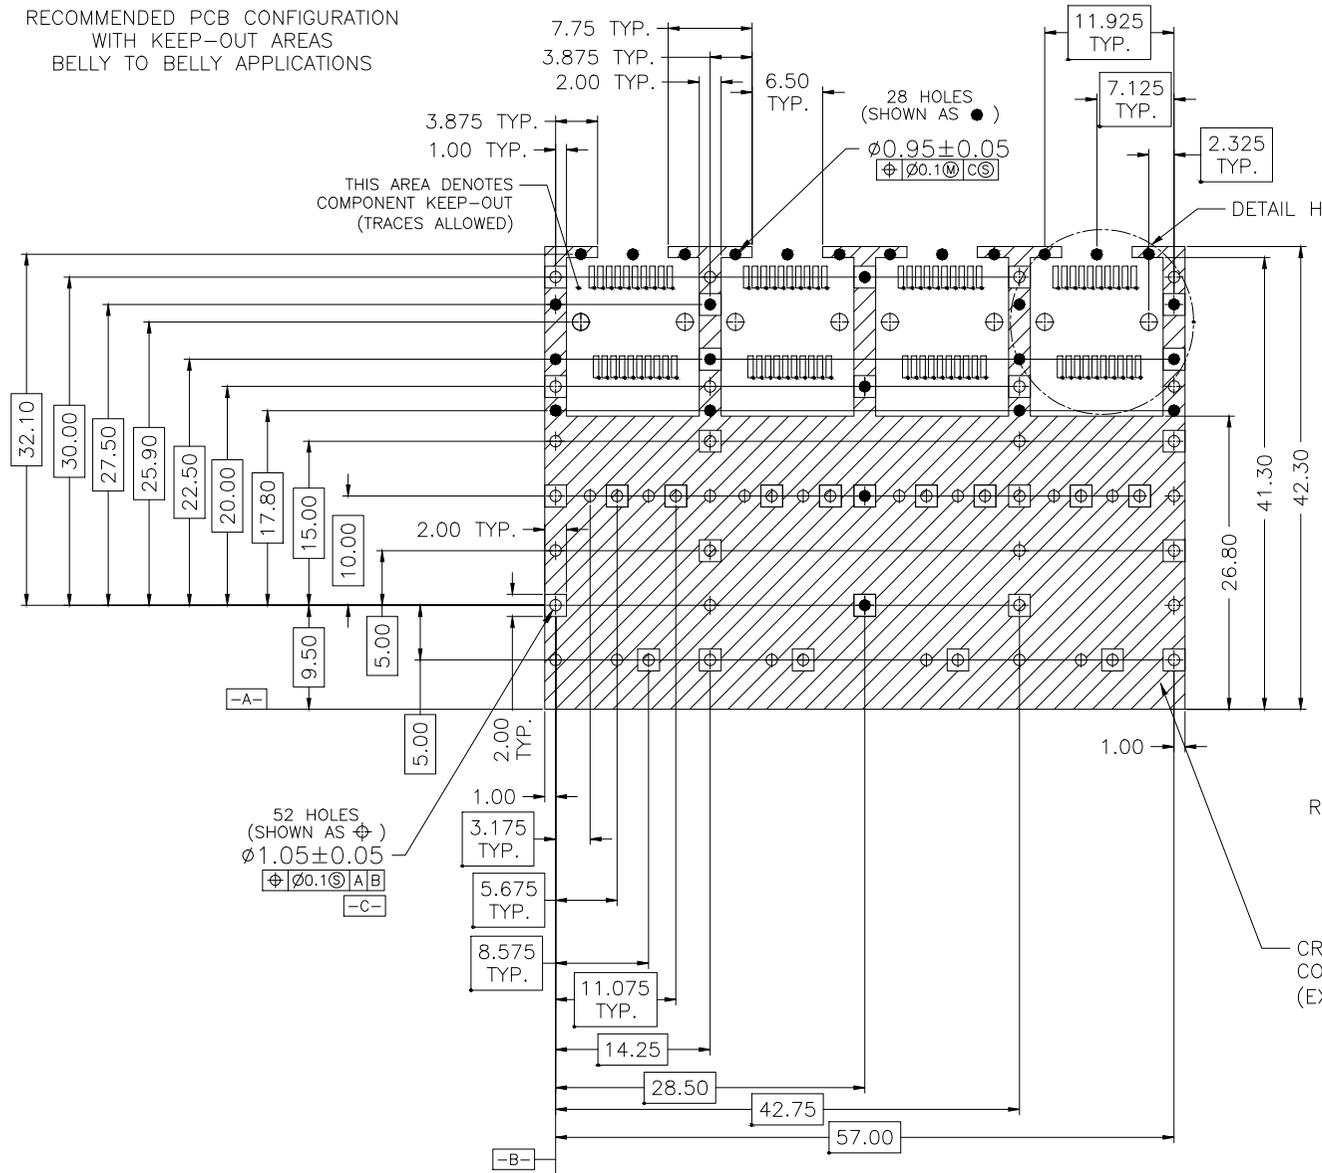


DETAIL H
RECOMMENDED CONNECTOR LAYOUT
8X INDIVIDUALLY



CROSS-HATCHED AREA DENOTES
COMPONENT AND TRACE KEEP-OUT
(EXCEPT CHASSIS GROUND)



TITLE			SFP 1x4 CAGE WITH EMI SPRING FINGER		LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.			LP14AC02000		GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	. X±0.20	. X±1°	SCALE:1:1	SHEET:3/5	REV:A	
LEO	JAMES	JAMES	. XX±0.15	. XX±5°				
			. XXX±0.10					

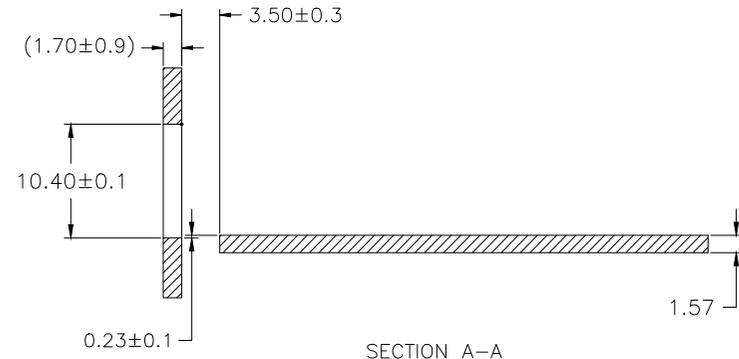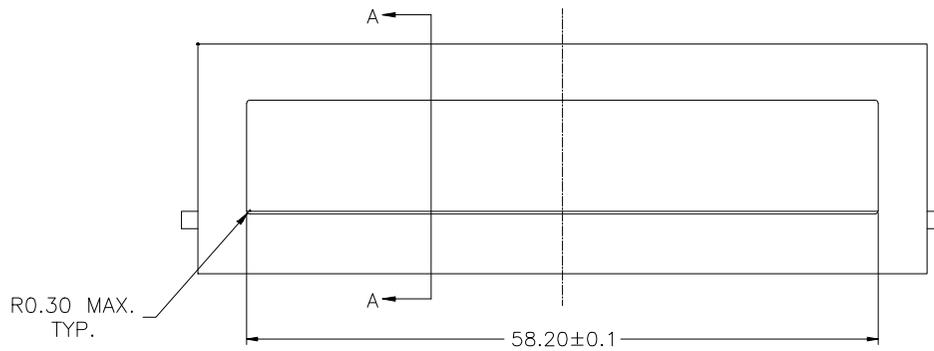

RECOMMENDED BEZEL DESIGN
SINGLE SIDED APPLICATIONS

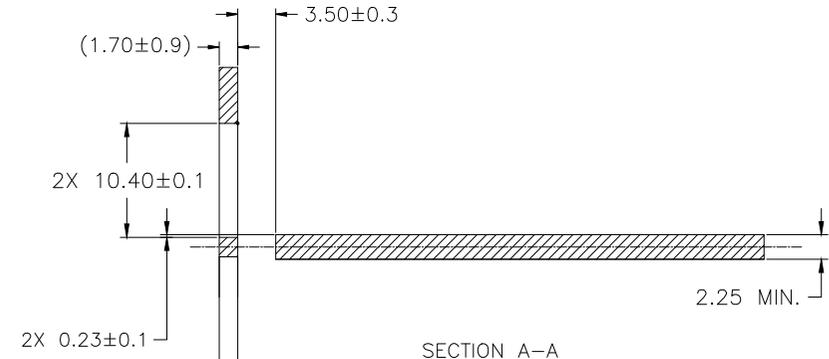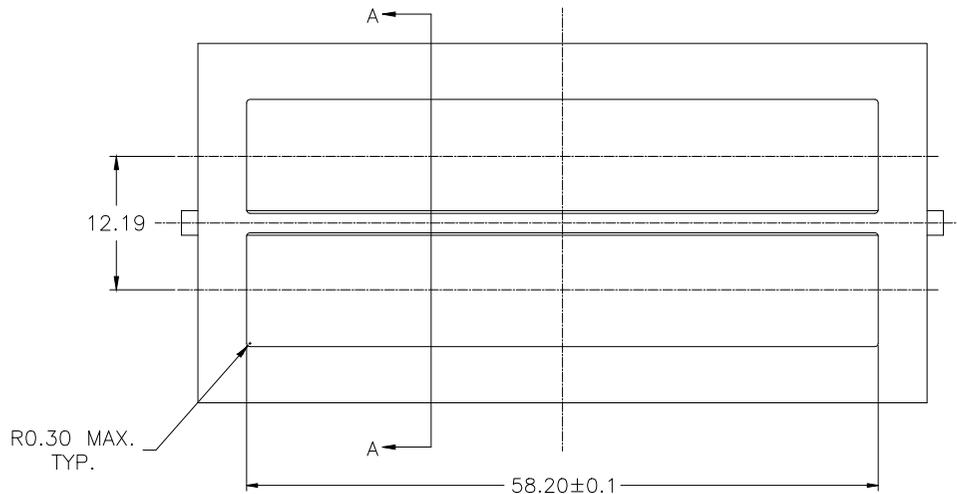


RECOMMENDED BEZEL DESIGN
BELLY TO BELLY APPLICATIONS




TITLE			SFP 1x4 CAGE WITH EMI SPRING FINGER		LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.			LP14AC02000		GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	• X±0.20	• X±1°	 SCALE:1:1	SHEET:4/5	REV:A	
LEO	JAMES	JAMES	• XX±0.15	• XX±5°				
			• XXX±0.10					


PACKAGE INFORMATION AND LABEL




1. PRODUCTS IN TRAYS



2. TRAYS OVERLAY:
(THE NEXT TRAY NEED ROTATE 180 DEGREE AND PUT IT ON PREVIOUS TRAY.)

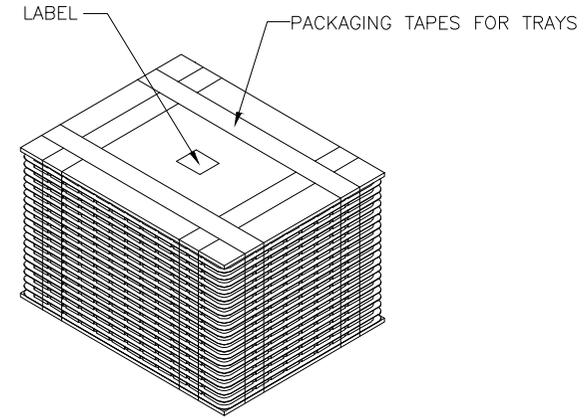

3. LABEL & PACKAGING TAPES FOR TRAYS:

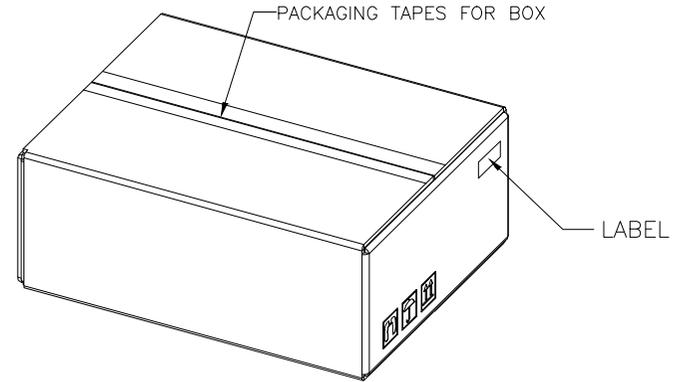

4. LABEL & PACKAGING TAPES FOR BOX

PACKAGING LISTS	
ITEM	Q'TY
PRODUCT	128 PCS
TRAY	8 PCS
BOX(L340*W265*H200MM)	1 PCS
LABLE	2 PCS
PACKAGING TAPFS	8 M (ABOUT)



TITLE			SFP 1x4 CAGE WITH EMI SPRING FINGER		LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.			LP14AC02000		GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	 SCALE:1:1	SHEET:5/5	REV:A	
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°				
			◦ XXX±0.10					